



Infinity iW-1941 RDM

Zoom Range 3.6-60 Deg

Pixel Control

Battery Powered Display

On board WDMX by Wireless Solutions Sweden

White Output Mode

SOURCE

Light Source Type	LED	Beam Angle (min)	3.6 deg
Light Source Quantity	19	Beam Angle (max)	60 deg
Light Source Power	40W	Zoom Type	Motorised
Led Colour Type	RGBW		

OPTICAL

Refresh Rate	600 - 15 Hz	<u>CONTROL & PROGRAMMING</u>	
Lumen Total	8742 lm	Control Mode	DMX, Built-in Program
CRI	78	DMX Channels	20, 177, 76 Art-Net+ 13D MX

Movement

Pan	540	Protocols	DMX, RDM, Art-Net
Tilt	270	Display	Touch, Gravity Sensor
Pan/Tilt Resolution	16bit	Dimming Resolution	16bit

RIGGING

Mounting Options	Quick Lock, Clamp	Dim Curve	Linear, Square, S-Curve, I-Square
Safety Attachment	Yes	Zone Control	19 Sections

TERMAL SPECIFICATIONS

		Wireless	WDMX
		Max Ambient Temp	45 deg C

ELECTRIC SPECIFICATIONS & CONNECTIONS

Power Supply	100-240 VAC 50-60Hz	Fuse	10A
Power Consumption	625W	Data Connector In	etherCON
Power Connector in	PowerCON Blue in (m)	Data Connector Out	etherCON
Power Connector out	PowerCON Grey out (f)	DMX Connector	XRL 3P & 5P IN/OUT

PRODUCT PROPERTIES



Cooling	Axial Fan	<u>INCLUDED ITEMS</u>	
		Included Cables	PowerCON Cable
		Included Accessories	User Manual

CERTIFICATIONS

Reference Standards	CE	Included Rigging	Quick Lock Bracket
---------------------	----	------------------	--------------------



Clearlight Shows Pty Ltd

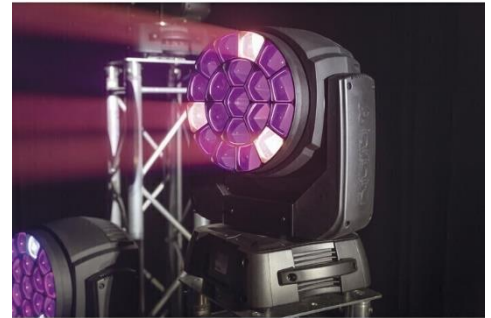
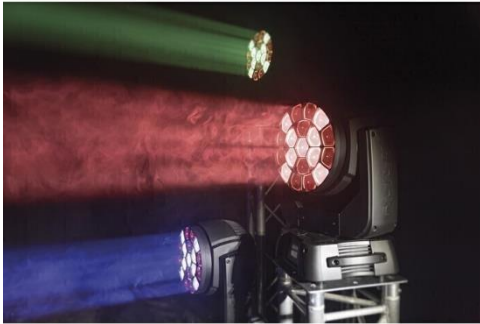


DYNAMIC EFFECTS

Dimmer	1-100%
Strobe	0-20HZ
Macro	Pixel Effects

MECHANICAL SPECS

Length	365 mm
Width	304 mm
Height	468 mm
Weight	19.3 kgs
IP Rating	IP20
Housing	Metal, Plastic
Colour	Black

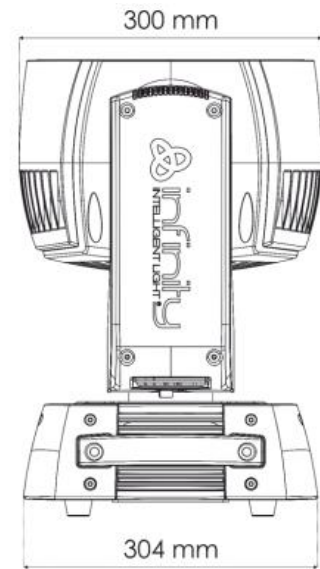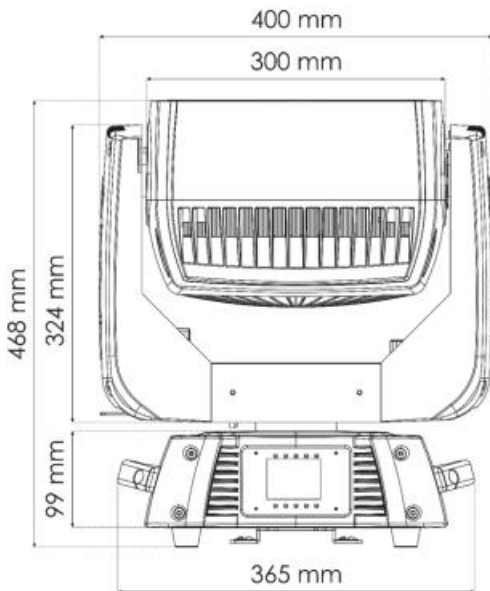

Clearlight Shows Pty Ltd