



Showtec Spectral Revo 6

125W RGBALC LED Array Par
Fixed 17 Deg beam angle
IP65 rating

PC Lens optics for homogenous output

12 Step CCT colour temp from 1800K – 8000K

SOURCE

Light Source Type	LED	Refresh Rate (min-max)	600 Hz - 25 kHz
Light Source Quantity	1	Lumen Total	3051 lm
Light Source Power	125W	CCT Range	1800K – 8000K
Led Colour Type	RGBALC		

OPTICAL

Beam Angle Circular	17 deg		
Optional Accessories	Barndoor	Optional Accessories	Top Hat

CONTROL & PROGRAMMING

Control Mode	DMX, Built-in Program	Display	OLED
DMX Channels	3, 6, 7, 9, 13, 20	Dim Curve	Linear, Square, S-Curve, I-Square
Protocols	DMX, RDM		

RIGGING

Mounting Options	Clamp, Quick lock, Surface	Safety Attachment	Yes
------------------	----------------------------	-------------------	-----

TERMAL SPECIFICATIONS

Max Ambient Temp	40 deg C	Min Ambient Temp	-10 deg C
------------------	----------	------------------	-----------

ELECTRIC SPECIFICATIONS & CONNECTIONS

Power Supply	100-240 VAC 50-60Hz	DMX Connector	XRL 5P IP65 IN/OUT
Power Consumption	145 W	Power Connector out	PowerCON True1 Out (f)
Power Connector in	PowerCON True1 In (m)	Cable Length	1.5m

PRODUCT PROPERTIES

Cooling	Forced Convection		
---------	-------------------	--	--

INCLUDED ITEMS

Included Cables	PowerCON True1 Cable	Included Rigging	Bracket
Included Accessories	User Manual		



Clearlight Shows Pty Ltd



DYNAMIC EFFECTS


Dimmer	1-100%
Strobe	0-20HZ

MECHANICAL SPECS

Length	425 mm
Width	320 mm
Height	219 mm
Weight	6.1 kgs
IP Rating	IP65
Housing	Aluminium Die Cast
Colour	Black

CERTIFICATIONS

Reference Standards	CE
---------------------	----

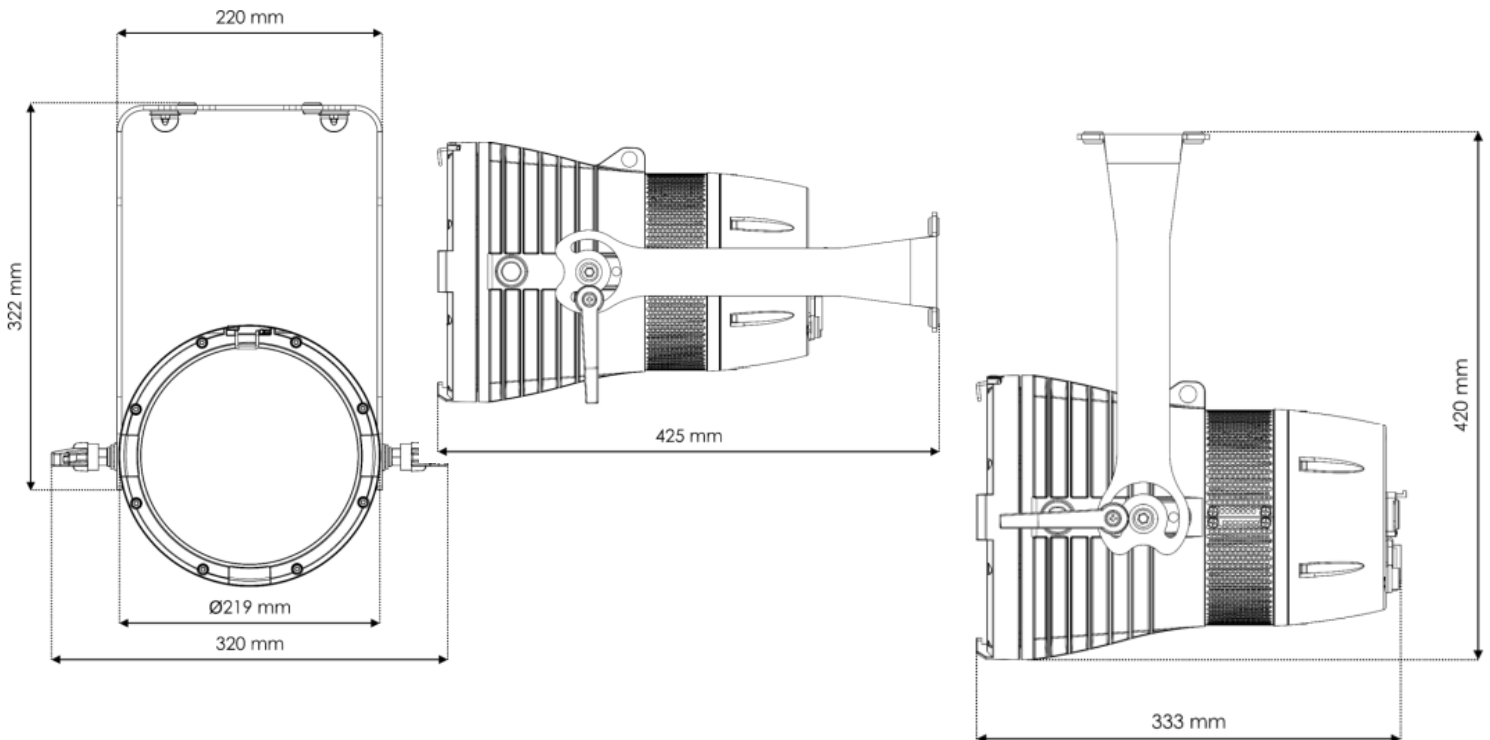

Clearlight Shows Pty Ltd